
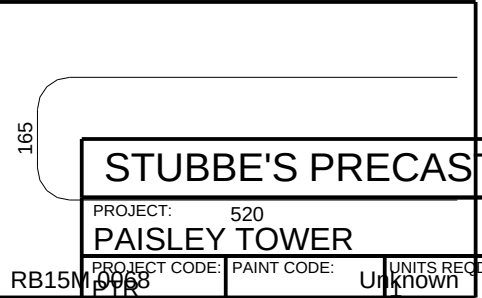
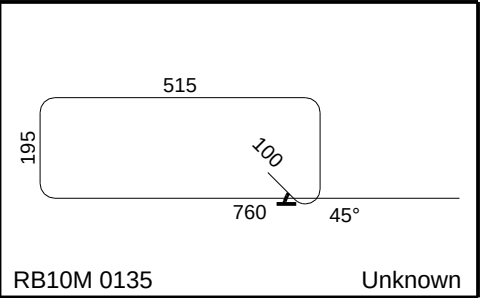
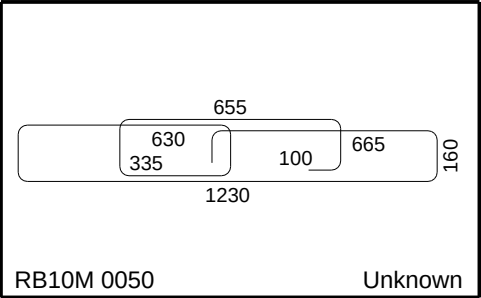
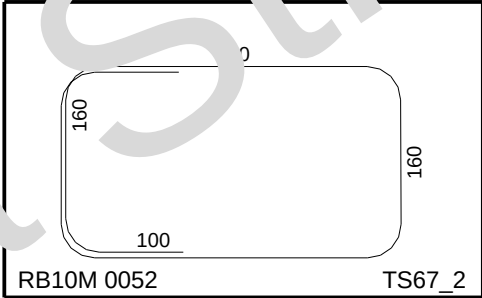
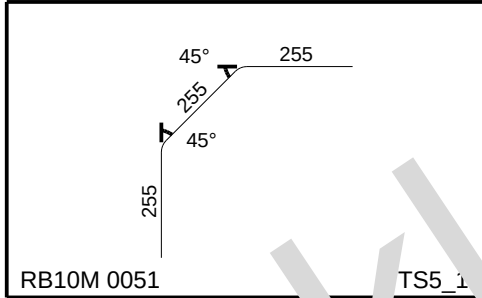
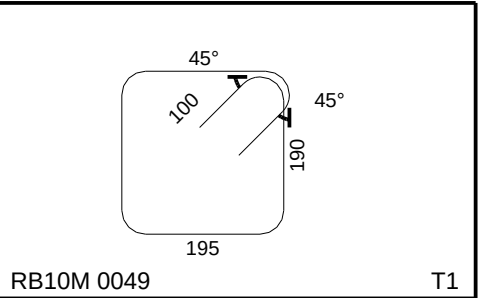
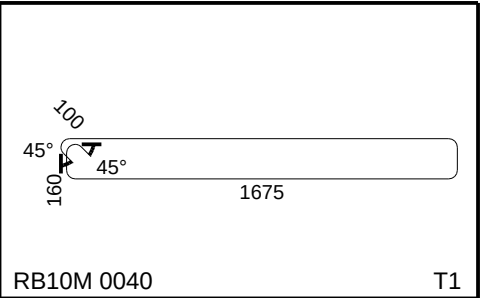
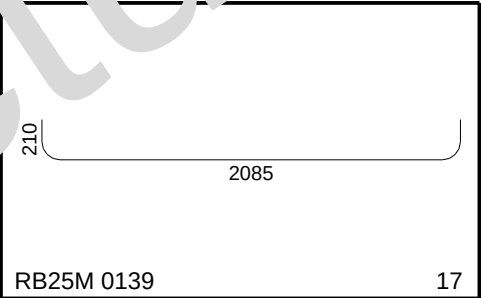
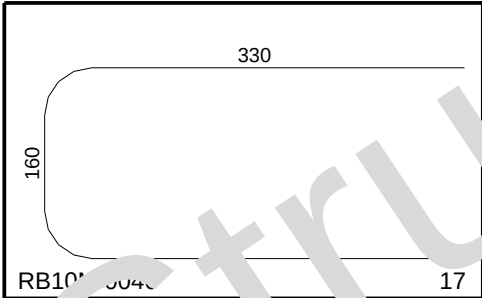


REINFORCING BILL OF MATERIALS																				
LINE	MARK	QTY	SIZE	GRADE	TYP	ANGLE	A	B	C	D	E	F	G	H	H2	J	K	K2	O	PIN DIA.
RB10M 0040	10	10M	400W	T1		75	160	1675	160	1675			75							
RB10M 0046	19	10M	400W	17			330	160	330											60
RB10M 0049	12	10M	400W	T1		85	190	195	190	195			85							40
RB10M 0050	12	10M	400W	Un***																
RB10M 0051	8	10M	400W	TS5_1		255	255	125												60
RB10M 0052	13	10M	400W	TS***		100	160	120	160	280	160	100								40
RB10M 0125	4	10M	400W	14		200	140	120	140	200				100	100				405	60
RB10M 0135	22	10M	400W	Un***																
RB10M 0065	1	15M	400W	Un***																
RB25M 0139	1	25M	400W	17		2380	210	2085	210											150
	2	10M	400W	STR		170	170													
	12	10M	400W	STR		600	600													
	12	10M	400W	STR		2020	2020													
	6	10M	400W	STR		2620	2620													
	6	10M	400W	STR		2870	2870													
	2	10M	400W	STR		8790	8790													
	3	10M	400W	STR		9270	9270													
	2	15M	400W	STR		180	180													
	1	15M	400W	STR		240	240													
	2	15M	400W	STR		2360	2360													
	4	15M	400W	STR		2560	2560													
	14	15M	400W	STR		2620	2620													
	14	15M	400W	STR		2880	2880													
	2	15M	400W	STR		3200	3200													
	4	15M	400W	STR		4750	4750													
	4	15M	400W	STR		7890	7890													
	2	15M	400W	STR		8790	8790													
	2	15M	400W	STR		9270	9270													

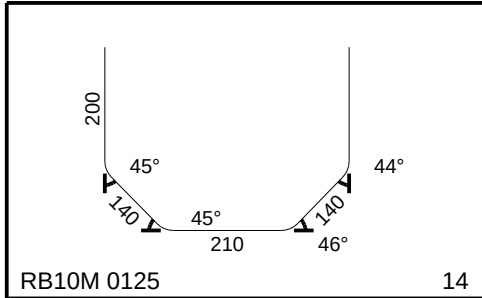

STUBBE'S PRECAST

PROJECT: 520
PAISLEY TOWER

PROJECT CODE: PPR PAINT CODE: Unk UNITS REQ.: Unk

DRAWN BY: DATE: 22.09.2026 SCALE: AS SHOWN

ENGINEER: NA DATE: FILE:

PROJECT No: P22-132 PIECE MARK: W10-48

PAGE - 3